

Bergsteiger Memphis: assembly instructions

To mount the rear fender, please use the two enclosed plastic rings to reduce the diameter of the fender attachment. The two rings are different sizes. First insert the larger, then the smaller ring. Open the Phillips screw enough to push the seat post through.




Insert the seat post with the fender into the frame tube. Adjust the saddle to the desired height and tighten the quick release (see operating instructions p. 16). Now center the rear fender and screw it tight.



To mount the front fender, please use the enclosed hexagonal screw, the two washers and the nut included in the scope of delivery. Insert the bolt through the hole in the triple clamp (1) from the back to the front. Then put the front lamp (2) on the screw. Both washers and the front fender (3) follow. Everything is attached to the fork crown (1) with the nut.

👍 We wish you a good ride and a lot of fun with your mountain bike!

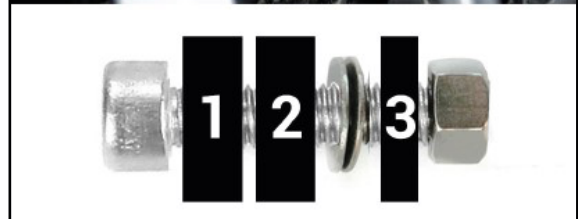

1. Triple clamp
2. Front lamp bracket
3. Fender bracket